

## Key Highlights:

- **Type:** 400GBASE-SR8 QSFP-DD
- **Compatibility:** Multi-Vendor MSA Compatible
- **Tx/Rx Wavelength:** 850 nm
- **Laser:** VCSEL
- **Modulation:** PAM4
- **Fiber Type:** Multi-Mode Fiber (MMF)
- **Connectors:** MTP/MPO - 16
- **Optical Budget:** 1.9dB
- **Max. Distance:** 100m over OM5
- **Data Rate:** 425 Gbps
- **DDM/DOM:** Supported
- **Power Consumption:** ≤ 10W
- **Temperature:** Standard 20° - 60°C



## Optical Transceiver : 400G-QSFP-DD-100

### Product Description:

400G-QSFP-DD-100 is a 400GBASE-SR8 Multi-Vendor MSA Compatible QSFP-DD (Quad Small Form-Factor Pluggable - Double Density) Transceiver designed for operation over Multi-Mode Fiber (MMF) optical cable. On the transmission side module converts 8x 50G PAM4 (Pulse-Amplitude Modulation) electrical input channels (each 53.125Gbps) into 8x independent PAM4 optical signal with baud rate of 53.125 Gbps. Module has minimum guaranteed optical budget of 1.9 dB, which in most cases is enough to reach 100 m distance over OM5 multi-mode fiber. However, distance is just indicative parameter for comfort of identification that is calculated by taking into account minimal optical budget and average attenuation of optical cabling in industry. 400G-QSFP-DD-100 uses top quality VCSEL (Vertical Cavity Surface Emitting Laser) (850 nm) transmitter and 400Gb/s PIN photodiode receiver. 400G-QSFP-DD-100 400GBASE-SR8 supports DDM/DOM optical diagnostics that provide real-time diagnostic information about the present operating conditions. 400G-QSFP-DD-100 operates in Standard 0°-70°C temperature range and has MTP/MPO-16 interface. 400G-QSFP-DD-100 400GBASE-SR8 QSFP-DD support up to 425 Gbps data rate and is designed for 400G Ethernet application. 400G-QS-



FP-DD-100 QSFP-DD Double Fiber optical transceiver is multi-purpose module used in number of different places of today's networking. Consequently, most popular use cases are in Internet Service Provider (ISP), Mobile Operator and Data Center Core Networks.

400G-QSFP-DD-100 400GBASE-SR8 QSFP-DD transceiver is CE/RoHS certified and is compliant with product safety standards. 400G-QSFP-DD-100 is fully compliant to QSFP-DD MSA, CMIS 4.0, IEEE 802.3bs 400 Gbps specification. Consequently, compliance to above standards guarantees that module is compatible and works with majority of networking equipment, where is not implemented special algorithm for protection against third party modules. However – our technical team has accumulated deep expertise in custom-encoded firmware's for 400GBASE-SR8 QSFP-DD transceiver in order to make it work in almost any brand equipment. We will be glad to know your requirements.

## Product Specification:

| General parameter                      | Value                          |
|--|--------------------------------|
| Media Type:                            | Multi-Mode Fiber (MMF)         |
| Connectors:                            | MTP/MPO - 16                   |
| TX Wavelength:                         | 850 nm                         |
| RX Wavelength:                         | 850 nm                         |
| Minimum Optical Budget:                | 1.9dB                          |
| Maximum Distance:                      | 100m                           |
| Supported Data Rate:                   | 425 Gbps                       |
| Data Rate, each Lane up to:            | 53.125 Gbps                    |
| Modulation:                            | PAM4                           |
| Supported Applications:                | Ethernet (425 Gbps), Infinband |
| Digital Diagnostic Monitoring (DDM):   | Supported                      |
| Optical Clock And Data Recovery (CDR): | Supported                      |
| Operating Temperature Range:           | Standard 20° - 60°C            |
| Storage Temperature Range:             | - 40° to 85°C                  |
| Relative Humidity (Non-Condensation):  | 0 to 85%                       |
| Power Consumption:                     | ≤ 10W                          |
| Power Supply Voltage Typical:          | + 3.3V                         |
| Power Supply Voltage Range:            | -3.135 to 3.465V               |



| General parameter | Value  |
|-------------------|--|
| Chipset:          | INPHI  |
| Compliance:       | QSFP-DD MSA, IEEE 802.3bs, CE, RoHS-6, Class 1 Laser Product, IEC60825-1, 21 CFR 1040.10 - 1040.11 |


| Transmitter Parameters:                                     | Value                                |
|---|--------------------------------------|
| Transmitter Type:   | VCSEL Laser                          |
| Tx Wavelength Bandwidth:                                    | 8 lanes with 850nm center wavelength |
| Average Launch Power Each Lane (Max):                       | 4 dBm                                |
| Average Launch Power Each Lane (Min):                       | -6 dBm                               |
| Outer Optical Modulation Amplitude OMA (Min) Each Lane:     | - 4 dBm                              |
| Outer Optical Modulation Amplitude OMA (Max) Each Lane:     | 3 dBm                                |
| Launch Power in OMA minus TDECQ (Min) Each Lane:            | - 5 dBm                              |
| Extinction Ratio (Min):                                     | 3 dB                                 |
| Average Launch Power OFF Transmitter (Max) Each Lane:       | - 30 dBm                             |
| Optical Return Loss Tolerance:                              | 12 dB                                |
| Transmitter and Dispersion Eye Closure for PAM4, Each Lane: | 4 dB                                 |

| Receiver Parameters:                   | Value                                |
|--|--------------------------------------|
| Receiver Type:                         | PIN Photodiode Array                 |
| Rx Wavelength Bandwidth:               | 8 lanes with 850nm center wavelength |
| Average Receive Power Each Lane (Min): | -7.9 dBm                             |



| Receiver Parameters:                     | Value              |
|--|--------------------|
| Average Receive Power Each Lane (Max):   | 45 dBm             |
| Damage Threshold Each Lane:              | 55 dBm             |
| Receiver Sensitivity (OMA)<br>Each Lane: | -5.9 dB (Equation) |
| Receiver Reflectance (Max):              | -28 dB             |
| LOS Assert (Min):                        | -38 dBm            |
| LOS De-assert (Max):                     | -9.2 dBm           |
| LOS Hysteresis (Min):                    | 0.5 dB             |

## Mechanical Dimensions:

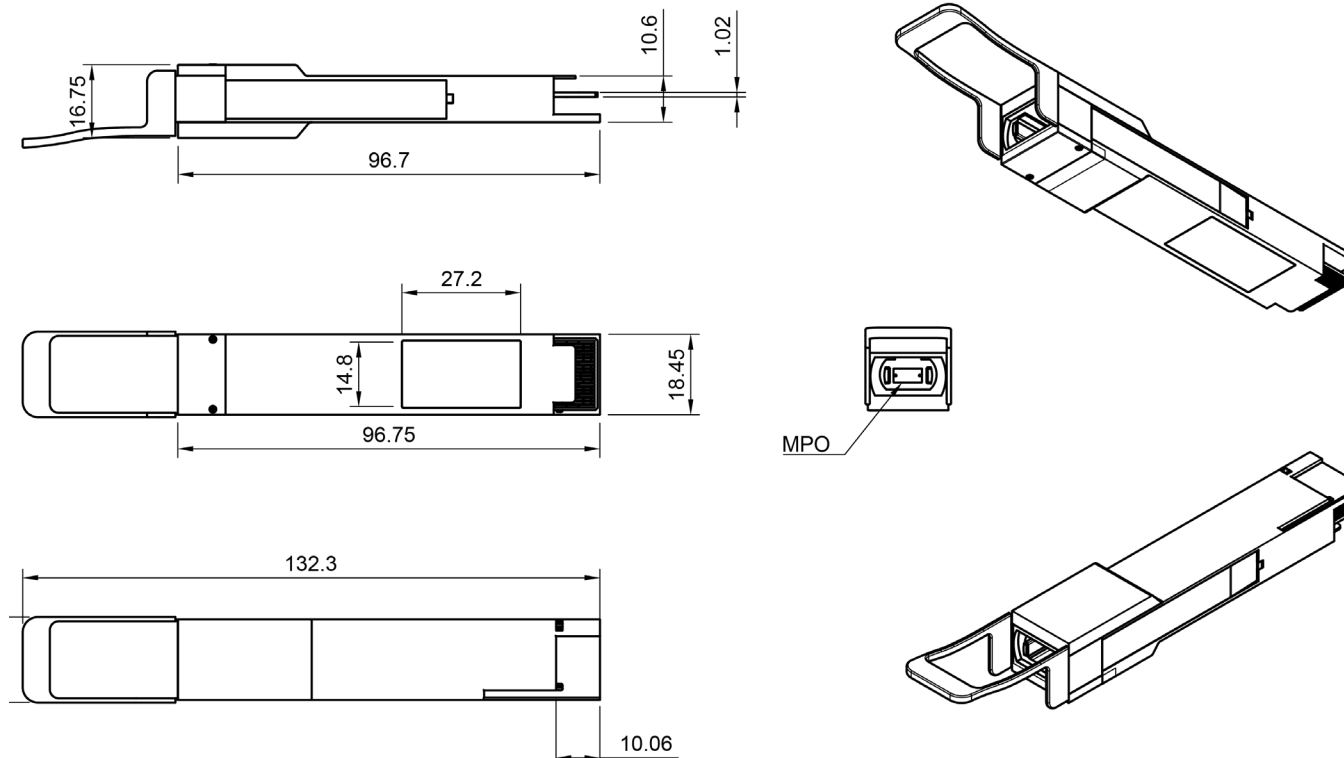

## Compatibility:

EDGE Optical transceivers can be provided with custom-encoded firmware, in order to provide compatibility with more than 100 vendor brands in data and telecom communications industry:

**MS** - General MSA

**AD** - ADVA

**AE** - Advantech

**AL** - Alcatel (Nokia)

**AT** - Allied Telesis

**AR** - Arista

**AS** - Arris

**AV** - Avaya

**BC** - Barracuda

**BR** - Broadcom

**QL** - Cavium (Qlogic)

**CR** - Ceragon

**CP** - Checkpoint

**CH** - Chelsio

**CN** - Ciena

**CI** - Cisco

**LI** - Cisco (Linksys)

**CE** - Comnet

**CO** - Coriant

**DH** - Dahua

**DC** - DCN

**DL** - Dell & Force10

**DK** - D-Link

**DZ** - DZS(Dasan-Zhone)

**EI** - ECI

**EC** - EdgeCore

**EW** - EdgeWare

**EL** - Eltex

**EM** - EMC2

**EN** - Enterasys

**ER** - Ericsson

**EF** - EXFO

**EX** - Extreme Networks

**F5** - F5 Networks

**FI** - Finisar

**FO** - Fortinet

**FU** - Fujitsu

**H3** - H3C

**HI** - Hirschmann

**HU** - Huawei

**IB** - IBM

**IF** - Infinera

**IN** - Intel

**IX** - Ixia

**JU** - Juniper Networks

**KM** - KeyMile

**KY** - KyLand

**LN** - Lenovo

**ML** - Mellanox

**ME** - Meraki (Cisco)

**MT** - MikroTik

**MO** - Moxa

**MR** - MRV

**NC** - NEC

**NG** - Netgear

**NK** - Nokia

**NT** - Nortel

**NS** - NSN

**OR** - Oracle

**PA** - Palo Alto Network

**PL** - Planet

**QC** - QCT(Quanta)

**QN** - QNAP

**RD** - RAD

**RW** - RadWare

**RC** - Raisecom

**RK** - Ruckus

**RU** - Ruijie Networks

**SG** - Samsung

**SV** - Sandvine

**SC** - Silicom

**SF** - SolarFlare

**SW** - Sonicwall

**SM** - Supermicro

**SY** - Synology

**TC** - Telco Systems

**TP** - TP-LINK

**TN** - Trendnet

**UN** - Ubiquiti Networks

**VX** - VeEx

**WG** - WatchGuard

**WS** - Waystream

**WT** - Westermo

**ZT** - ZTE

**ZX** - Zyxel

**HP** - HP

**AG** - Avago

**OC** - Oclaro

**EU** - Emulex

**TM** - Transmode

**AU** - HP Aruba

**XX** - Other

## Warranty:

EDGE Optic's provides a limited **warranty for sixty (60) months** from Purchaser's receipt of the Equipment represented in this data sheet against defective design or workmanship. Warranty does not cover damage caused by improper deployment, misuse and accidents.

