


## Key Highlights:

- **Type:** 100G BIDI ER1 QSFP28
- **Compatibility:** Multi-Vendor MSA Compatible
- **Tx/Rx Wavelength:** 1309.14nm / 1304.58nm
- **Laser:** EML
- **Modulation:** PAM4
- **Fiber Type:** Single-Mode Fiber (SMF)
- **Connectors:** Simplex LC
- **Optical Budget:** 14.7 dB
- **Max. Distance:** 30 km
- **Data Rate:** 106.25 Gbps
- **Forward Error Correction:** Integrated in DSP
- **DDM/DOM:** Supported
- **Power Consumption:** ≤4.5 W
- **Temperature:** Standard 0°-70°C

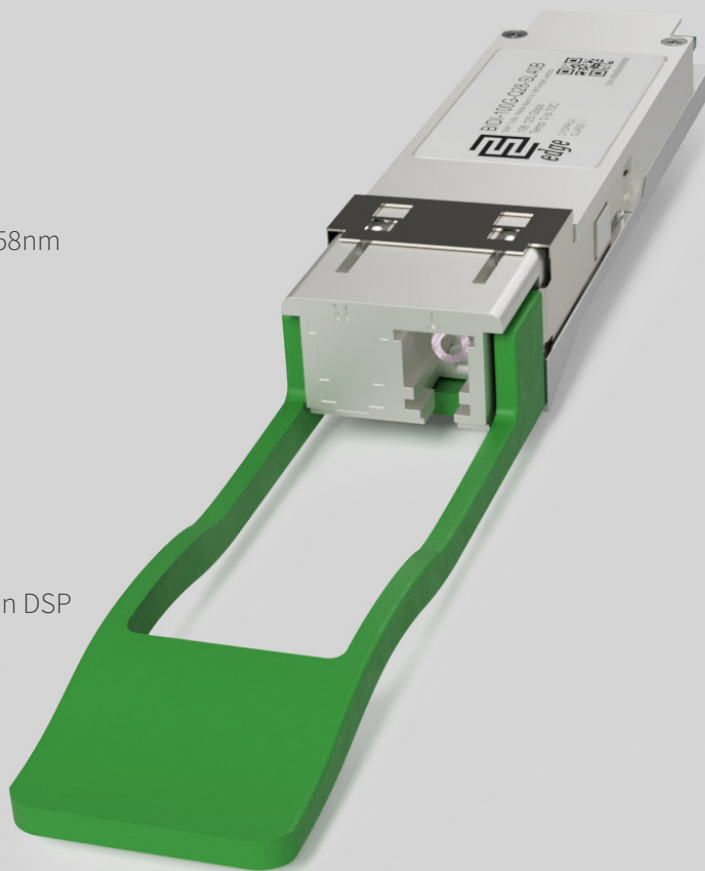

## Optical Transceiver : BIDI-100G-Q28-SL40B

### Product Description:

BIDI-100G-Q28-SL40B is a B side 100G BIDI ER1 Multi-Vendor MSA Compatible Bidirectional QSFP28 (Quad Small Form-Factor Pluggable 28) Transceiver designed for operation over Single-Mode Fiber (SMF). BIDI 100G ER1 QSFP28 has a built in BIDI 100G PAM4 (Pulse Amplitude Modulation 4-level) DSP (Digital Signal Processor) based gearbox used to convert four electrical interface lanes 4x25Gbps (CAUI-4) NRZ to one 50Gbaud (100Gbps) PAM4 signal lane. FEC (Forward Error Correction) block is also integrated in the DSP unit. The PAM4 gearbox generates RS (544,514) FEC, which means that transceiver can work on any standard, FEC disabled, equipment. 100G BIDI transceivers are designed for dense applications and provide the ability for operators and service providers to save optical fiber resources. Please note to establish A to B connection this B side BIDI-100G-Q28-SL40B module must work in pair with A side BIDI 100G ER1 module BIDI-100G-Q28-SL40A.

100G BIDI ER1 PAM4 B side module has a minimum guaranteed optical budget of 14.7 dB, which in most cases is enough to reach 30km. However, distance is just an indicative parameter calculated for comfort of identification.



Eventually we calculate distance taking in account minimal optical budget and average attenuation of optical cabling in industry. 100G BIDI ER1 uses 1 channel 106.25 Gbps EML (External Modulation Laser) 1304.58 nm transmitters and 1 channel 106.25 Gbps PIN 1309.14 nm photodiode receivers. Module supports DDM/DOM optical diagnostics, which provide diagnostic information about the present operating conditions. 100G BIDI ER1 QSFP28 operates in the standard 0°-70°C temperature range and has a Single LC optical connector and 38 pins edge connector for electrical interface. 100G BIDI ER1 QSFP28 Side B module supports 106.25 Gbps data rate and such applications as 100G Ethernet.

100G BIDI ER1 QSFP28 Side B transceivers are widely used in Cisco, HP, Juniper, Huawei and other industry well known manufacturers equipment. Transceivers are CE/RoHS certified and are compliant with product safety standards. BI-DI-100G-Q28-SL40B transceiver is fully compliant to QSFP28 Multi Source Agreement (MSA), 100G Lambda MSA, where IEEE 802.3cu defines physical layer specifications CAUI-4 electrical interface, SFF-8679 defines QSFP+ 4X Hardware and Electrical Specification but SFF-8636 Rev 2.10a defines Management Interface for 4-lane Modules.. Consequently, compliance to above standards guarantees that module is compatible and works with majority of networking equipment, where is not implemented special algorithm for protection against third party modules. However – we have accumulated expertise in custom-encoded firmware for BIDI-100G-Q28-SL10B in order to make these modules work in almost any brand of equipment. We will be glad to know your requirements – Contact Us.

## Product Specification:

General parameter	Value
Media Type:	Single-Mode Fiber (SMF)
Connectors:	Simplex LC
TX Wavelength:	1309.14 nm
RX Wavelength:	1304.58 nm
Minimum Optical Budget:	14.7 dB
Maximum Distance:	30 km
Supported Data Rate:	106.25 Gbps
Modulation:	PAM4
Supported Applications:	100G Ethernet (106.25 Gbps)
Digital Diagnostic Monitoring (DDM):	Supported
Forward Error Correction (FEC):	Integrated in DSP
Operating Temperature Range:	Standard 0° - 70°C





General parameter	Value
Storage Temperature Range:	- 40° to 85°C
Relative Humidity (Non-Condensation):	5 to 95%
Power Consumption:	≤4.5W
Power Supply Voltage Typical:	+ 3.3V
Power Supply Voltage Range:	-3.135 to 3.465V
Compliance:	SFF-8636 Rev 2.10a, CAUI-4, SFF-8679, RoHS-6, CE, IEEE 802.3cu, 100G Lambda MSA

Transmitter Parameters:	Value
Transmitter Type:	EML Laser
Tx Wavelength Bandwidth:	2.09 nm
Average Launch Power, Each Lane (Max):	0 dBm
Average Launch Power, Each Lane (Min):	5.6 dBm
Extinction Ratio (Min):	5 dB

Receiver Parameters:	Value
Receiver Type:	PIN Photodiode Array
Rx Wavelength Bandwidth:	2.09 nm
Average Receive Power Each Lane (Min):	-14.7 dBm
Average Receive Power Each Lane (Max):	-3.4 dBm
Damage Threshold Each Lane:	-2.4 dBm



## Mechanical Drawing

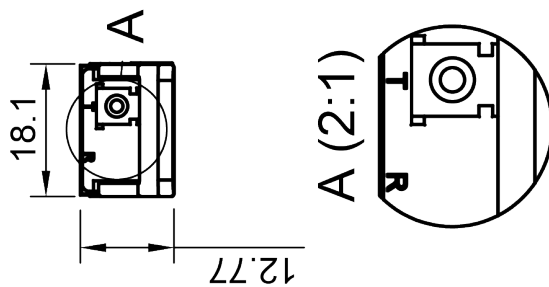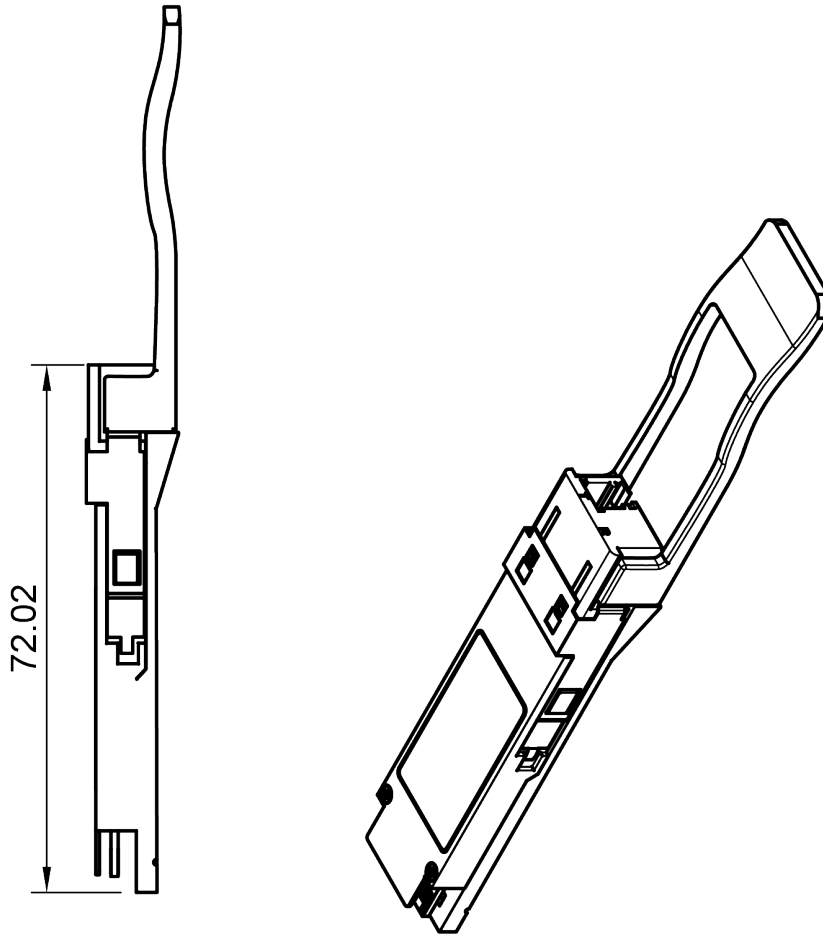

## Compatibility:

EDGE Optical transceivers can be provided with custom-encoded firmware, in order to provide compatibility with more than 100 vendor brands in data and telecom communications industry:

**MS** - General MSA**AD** - ADVA**AE** - Advantech**AL** - Alcatel (Nokia)**AT** - Allied Telesis**AR** - Arista**AS** - Arris**AV** - Avaya**BC** - Barracuda**BR** - Broadcom**QL** - Cavium (Qlogic)**CR** - Ceragon**CP** - Checkpoint**CH** - Chelsio**CN** - Ciena**CI** - Cisco**LI** - Cisco (Linksys)**CE** - Comnet**CO** - Coriant**DH** - Dahua**DC** - DCN**DL** - Dell & Force10**DK** - D-Link**DZ** - DZS(Dasan-Zhone)**EI** - ECI**EC** - EdgeCore**EW** - EdgeWare**EL** - Eltex**EM** - EMC2**EN** - Enterasys**ER** - Ericsson**EF** - EXFO**EX** - Extreme Networks**F5** - F5 Networks**FI** - Finisar**FO** - Fortinet**FU** - Fujitsu**H3** - H3C**HI** - Hirschmann**HU** - Huawei**IB** - IBM**IF** - Infinera**IN** - Intel**IX** - Ixia**JU** - Juniper Networks**KM** - KeyMile**KY** - KyLand**LN** - Lenovo**ML** - Mellanox**ME** - Meraki (Cisco)**MT** - MikroTik**MO** - Moxa**MR** - MRV**NC** - NEC**NG** - Netgear**NK** - Nokia**NT** - Nortel**NS** - NSN**OR** - Oracle**PA** - Palo Alto Network**PL** - Planet**QC** - QCT(Quanta)**QN** - QNAP**RD** - RAD**RW** - RadWare**RC** - Raisecom**RK** - Ruckus**RU** - Ruijie Networks**SG** - Samsung**SV** - Sandvine**SC** - Silicom**SF** - SolarFlare**SW** - Sonicwall**SM** - Supermicro**SY** - Synology**TC** - Telco Systems**TP** - TP-LINK**TN** - Trendnet**UN** - Ubiquiti Networks**VX** - VeEx**WG** - WatchGuard**WS** - Waystream**WT** - Westermo**ZT** - ZTE**ZX** - Zyxel**HP** - HP**AG** - Avago**OC** - Oclaro**EU** - Emulex**TM** - Transmode**AU** - HP Aruba**XX** - Other

## Warranty:

EDGE Optic's provides a limited **warranty for sixty (60) months** from Purchaser's receipt of the Equipment represented in this data sheet against defective design or workmanship. Warranty does not cover damage caused by improper deployment, misuse and accidents.

