

Key Highlights:

- **Type:** Fiber Optic Patch Cable
- **Connector:** CS Male (UPC) to CS Male (UPC) optical connector
- **Fiber Count:** 2 (Duplex)
- **Polarity:** Type A to B
- **Fiber Type:** OS2 9/125um Single-Mode Fiber (SMF)
- **Jacket Type:** LSZH
- **Wavelength:** 1310 | 1610 nm
- **Operating Temperature:** -20°C to +60°C
- **Color:** Yellow
- **Cable Length:** 1m to 10m

Fiber Optic Patch Cable: CS-CS-OS2-UPC-DX-B

Product Description:

CS-CS-OS2-UPC-DX-B are Senko CS connector patch cables, OS2 Single-mode, 2 Fiber, Type A to B cable available in length from 1 meter to 10 meters. These CS to CS cables use 9/125 micron Single-mode fiber with cable jacket diameter of 2 mm. Cable jacket material is Low Smoke Zero Halogen (LSZH) which ensures lower smoke and zero smoke characteristics. CS to CS cable supports wavelengths ranging from 1310nm to 1610nm. Senko CS connector insertion loss is 0.3dB. Operating temperature is rated to -20C to +60C which suits a wide range of environments. CS-CS-OS2-UPC-DX-B CS to CS cable is manufactured with Type A to B configuration to support transceiver to transceiver connections.

The CS Connector is an evolution in optical connectivity where CS connectors feature a 40% size reduction when compared to LC duplex connectors at the same time delivering increased performance. Connectors have two cylindrical, spring-loaded 1.25mm ferrules similar to LC connectors, within a single housing, but the CS connector's two ferrules are pitched at 3.8mm apart (standard LC duplex ferrules are pitched 6.25mm apart), which is the minimum possible spacing to meet the TOSA and ROSA optics requirement. Edge to edge size for CS connectors is 7.85mm, while for standard LC duplex connectors it is 13mm. The CS Connectors are standardized by the CS Consortium.




CS-CS-OS2-UPC-DX-B Senko CS connector patch cables are CE/RoHS certified and are compliant with product safety standards. CS to CS cable is fully compliant to the following product standards: Telcordia GR 326 CORE, IEC 613003-35-2015, IEC 61755-3-31 2015, and following fiber and cable standards: ISO/IEC 11801-1:2017, IEC60793-2-50 Single mode optical fiber cable transmission performance requirements and single mode optical fiber bending loss requirements and following data center cabling standards: ISO/IEC 11801-5, GB 50174, ISO/IEC 24764. IEC 61034 low smoke no halogen (LSZH), in accordance with IEC 60332-1, IEC60332-3C flame retardant performance. Standard of Indoor optical cable as defined by Telcordia GR 409 Core Issue 2, YD/T 128.3 2009.

Product Specification:

General parameter	Value
Connector A:	CS Male
Connector B:	CS Male
Polarity:	Type A to B
Fiber Type:	OS2 9/125um Single-Mode Fiber (SMF)
Fiber Count:	2 (Duplex)
Polish Type:	UPC to UPC
Jacket Diameter:	2.0mm
Jacket Type:	LSZH
Wavelength:	1310 1610 nm
Cable Insertion Loss (IL):	< 0.3 dB/km
Insertion Loss CS:	< 0.3 dB
Return Loss CS:	> 50 dB
Storage Temperature:	-40°C to +85°C
Operating Temperature:	-20°C to +60°C
Storage Humidity:	<95 %RH
Operation Humidity:	<85 %RH
Color:	Yellow
Cable Length:	1m 2m 3m 4m 5m 6m 7m 8m 9m 10m



Mechanical Dimensions:

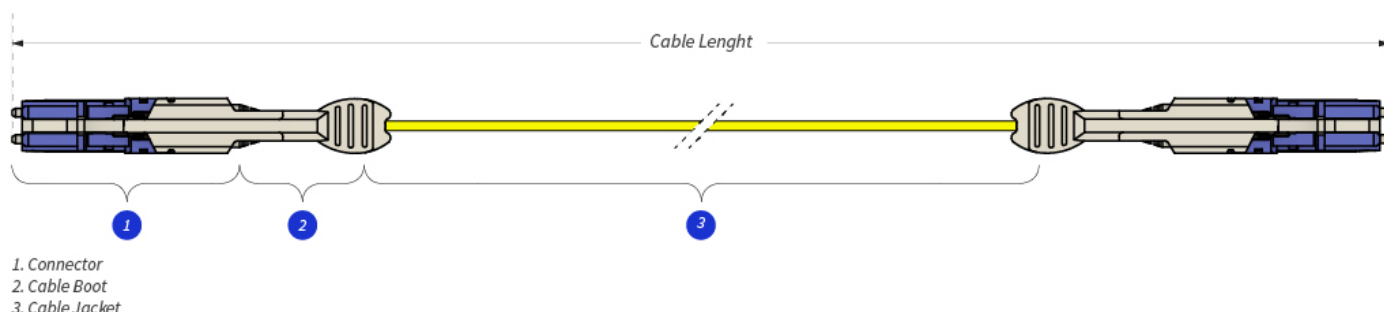

PN	Description
CS-CS-OS2-UPC-DX-B-1	CS Male to CS Male Fiber Optic Patch Cable (2 Fiber (Duplex), Type A to B, OS2 9/125um SMF, UPC, LSZH, Yellow, 1 Meter)
CS-CS-OS2-UPC-DX-B-2	CS Male to CS Male Fiber Optic Patch Cable (2 Fiber (Duplex), Type A to B, OS2 9/125um SMF, UPC, LSZH, Yellow, 2 Meter)
CS-CS-OS2-UPC-DX-B-3	CS Male to CS Male Fiber Optic Patch Cable (2 Fiber (Duplex), Type A to B, OS2 9/125um SMF, UPC, LSZH, Yellow, 3 Meter)
CS-CS-OS2-UPC-DX-B-4	CS Male to CS Male Fiber Optic Patch Cable (2 Fiber (Duplex), Type A to B, OS2 9/125um SMF, UPC, LSZH, Yellow, 4 Meter)
CS-CS-OS2-UPC-DX-B-5	CS Male to CS Male Fiber Optic Patch Cable (2 Fiber (Duplex), Type A to B, OS2 9/125um SMF, UPC, LSZH, Yellow, 5 Meter)
CS-CS-OS2-UPC-DX-B-6	CS Male to CS Male Fiber Optic Patch Cable (2 Fiber (Duplex), Type A to B, OS2 9/125um SMF, UPC, LSZH, Yellow, 6 Meter)
CS-CS-OS2-UPC-DX-B-7	CS Male to CS Male Fiber Optic Patch Cable (2 Fiber (Duplex), Type A to B, OS2 9/125um SMF, UPC, LSZH, Yellow, 7 Meter)
CS-CS-OS2-UPC-DX-B-8	CS Male to CS Male Fiber Optic Patch Cable (2 Fiber (Duplex), Type A to B, OS2 9/125um SMF, UPC, LSZH, Yellow, 8 Meter)
CS-CS-OS2-UPC-DX-B-9	CS Male to CS Male Fiber Optic Patch Cable (2 Fiber (Duplex), Type A to B, OS2 9/125um SMF, UPC, LSZH, Yellow, 9 Meter)
CS-CS-OS2-UPC-DX-B-10	CS Male to CS Male Fiber Optic Patch Cable (2 Fiber (Duplex), Type A to B, OS2 9/125um SMF, UPC, LSZH, Yellow, 10 Meter)



Warranty:

EDGE Optic's provides a limited warranty for **sixty (60)** months from Purchaser's receipt of the Equipment represented in this data sheet against defective design or workmanship.

