


## Key Highlights:

- **Type:** SFP28
- **Tx Wavelength:** Ch. 17 to Ch. 61 (1563.86 nm – 1528.77 nm)
- **Rx Wavelength:** ITU-T DWDM Grid 100 GHz C-B and
- **Media Type:** Single- Mode Fiber
- **Fiber Type:** Single-Mode Fiber (SMF)
- **Optical Budget:** 10 dB
- **Max. Distance:** 15 km
- **Data Rate:** 8.5-28.1 Gbps
- **Temperature:** Standard 0°-70°C

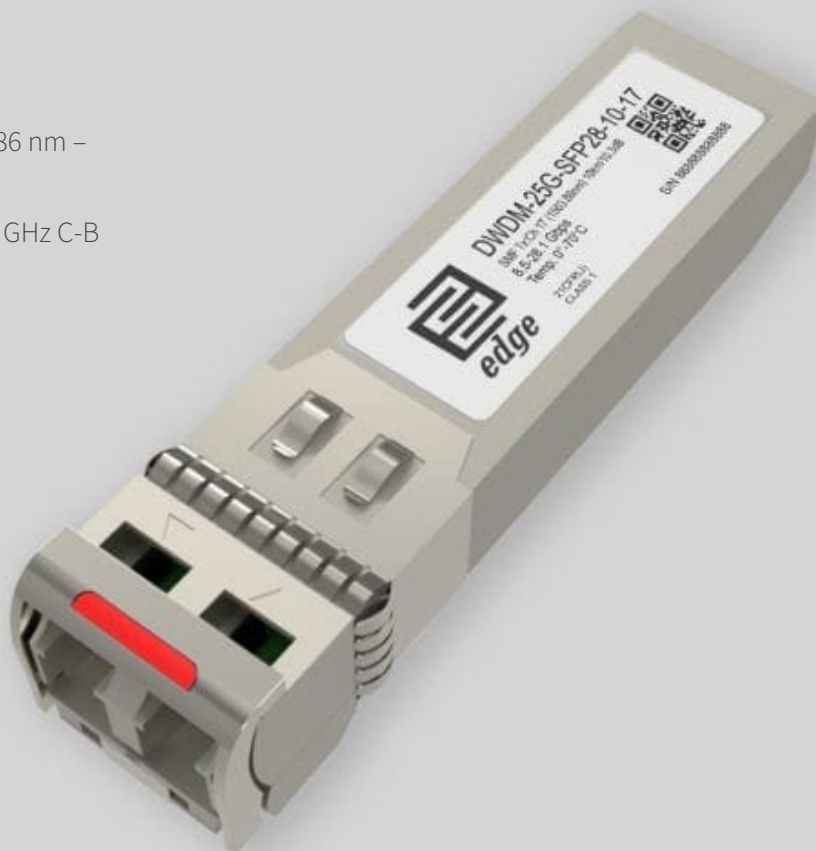

## Optical Transceiver : DWDM-25G-SFP28-10-XX

### Product Description:

DWDM-25G-SFP28-10-XX is a DWDM Ch. 17 to Ch. 61 (1563.86 nm – 1528.77 nm) 25GBASE-LR Multi-Vendor MSA Compatible SFP28 (Small Form-Factor Pluggable 28) Transceiver, operating over Double Fiber Single-Mode Fiber (SMF) optical cable. It has minimum guaranteed optical budget of 10 dB, which in most cases is enough to reach 15 km over OS2 fiber. However, distance is just indicative parameter for comfort of identification that is calculated by taking into account minimal optical budget and average attenuation of optical cabling in industry. DWDM-25G-SFP28-10-XX uses top quality DFB (Distributed Feedback Laser) transmitter and 25Gb/s PIN photodiode receiver. DWDM-25G-SFP28-10-XX DWDM 25GBASE-LR supports DDM/DOM optical diagnostics that provide real-time diagnostic information about the present operating conditions. DWDM-25G-SFP28-10-XX operates in Standard 0°-70°C temperature range and has Double LC interface. DWDM-25G-SFP28-10-XX DWDM 25GBASE-LR SFP28 support 8.5-28.1 Gbps data rate and is designed for 25G Ethernet (25.78 Gbps) and 10G Ethernet (10.31 Gbps) applications.



DWDM-25G-SFP28-10-XXSFP28 Double Fiber optical transceiver is multi-purpose module used in number of different places of today's networking. Consequently, most popular use cases are in Internet Service Provider (ISP) Access and Metro Networks Data Center Core Networks and Enterprise Campus Networks.

DWDM-25G-SFP28-10-xx DWDM 25GBASE-LR SFP28 transceiver is CE/RoHS certified and is compliant with product safety standards. DWDM-25G-SFP28-10-XX is fully compliant to SFF-8431 and SFF-8472 Multi Source Agreement (MSA), IEEE 802.3by 25 Gb/s specification. Consequently, compliance to above standards guarantees that module is compatible and works with majority of networking equipment, where is not implemented special algorithm for protection against third party modules. However – our technical team has accumulated deep expertise in custom-encoded firmwares for DWDM 25GBASE-LR SFP28 transceiver in order to make it work in almost any brand equipment. We will be glad to know your requirements.

## Product Specification:

General parameter	Value
Media Type:	Single-Mode Fiber (SMF)
Connectors:	Double LC
TX Wavelength:	Ch. 17 to Ch. 61 (1563.86 nm - 1528.77 nm)
RX Wavelength:	ITU-T DWDM Grid 100 GHz C-Band
Minimum Optical Budget:	10 dB
Maximum Distance:	15 km
Supported Data Rate:	8.5-28.1 Gbps
Supported Applications:	25G Ethernet (25.78 Gbps), 10G Ethernet (10.31 Gbps)
DDM/DOM:	Supported
Temperature Range:	Standard 0°-70°C
Power Supply Voltage Typical:	+3.3V single power supply
Compliance:	SFP+ MSA, SFF-8402, SFF-8472, SFF-8431, SFF-8432, CE, RoHS-6, Class 1 FDA and IEC60825-1 Laser Safety Compliant



## Product Specification:

Transmitter Parameters:	Value
Transmitter Type:	EML Laser
Tx Wavelength Bandwidth:	100GHz (0.8nm)
Minimum Transmitting Power:	-1 dBm
Maximum Transmitting Power:	5 dBm

Receiver Parameters:	Value
Receiver Type:	PIN photodiode
Rx Wavelength Bandwidth:	ITU-T DWDM Grid 100 GHz C-Band
Receiver Sensitivity:	-11.3 dBm
Receiver Overload:	0.5 dBm



## Compatibility:

EDGE Optical transceivers can be provided with custom-encoded firmware, in order to provide compatibility with more than 100 vendor brands in data and telecom communications industry:

**MS** - General MSA**AD** - ADVA**AE** - Advantech**AL** - Alcatel (Nokia)**AT** - Allied Telesis**AR** - Arista**AS** - Arris**AV** - Avaya**BC** - Barracuda**BR** - Broadcom**QL** - Cavium (Qlogic)**CR** - Ceragon**CP** - Checkpoint**CH** - Chelsio**CN** - Ciena**CI** - Cisco**LI** - Cisco (Linksys)**CE** - Comnet**CO** - Coriant**DH** - Dahua**DC** - DCN**DL** - Dell & Force10**DK** - D-Link**DZ** - DZS(Dasan-Zhone)**EI** - ECI**EC** - EdgeCore**EW** - EdgeWare**EL** - Eltex**EM** - EMC2**EN** - Enterasys**ER** - Ericsson**EF** - EXFO**EX** - Extreme Networks**F5** - F5 Networks**FI** - Finisar**FO** - Fortinet**FU** - Fujitsu**H3** - H3C**HI** - Hirschmann**HU** - Huawei**IB** - IBM**IF** - Infinera**IN** - Intel**IX** - Ixia**JU** - Juniper Networks**KM** - KeyMile**KY** - KyLand**LN** - Lenovo**ML** - Mellanox**ME** - Meraki (Cisco)**MT** - MikroTik**MO** - Moxa**MR** - MRV**NC** - NEC**NG** - Netgear**NK** - Nokia**NT** - Nortel**NS** - NSN**OR** - Oracle**PA** - Palo Alto Network**PL** - Planet**QC** - QCT(Quanta)**QN** - QNAP**RD** - RAD**RW** - RadWare**RC** - Raisecom**RK** - Ruckus**RU** - Ruijie Networks**SG** - Samsung**SV** - Sandvine**SC** - Silicom**SF** - SolarFlare**SW** - Sonicwall**SM** - Supermicro**SY** - Synology**TC** - Telco Systems**TP** - TP-LINK**TN** - Trendnet**UN** - Ubiquiti Networks**VX** - VeEx**WG** - WatchGuard**WS** - Waystream**WT** - Westermo**ZT** - ZTE**ZX** - Zyxel**HP** - HP**AG** - Avago**OC** - Oclaro**EU** - Emulex**TM** - Transmode**AU** - HP Aruba**XX** - Other

## Warranty:

EDGE Optic's provides a limited warranty for **sixty (60)** months from Purchaser's receipt of the Equipment represented in this data sheet against defective design or workmanship.

## Ordering Information:

Part Number	Data Rate	Applications	Temperature Range	Available DWDM Channels
DWDM-25G-SFP28-10-XX*	8.5-28.1 Gbps	Up to 15 km	0°-70°C	<b>17 to 61</b> ITU-T 100Ghz C-Band 1563.86nm to 1528.77nm

\*XX represents the chosen channel, thus Ch.17 would be DWDM-25G-SFP28-10-17 (1563.86nm, 191.7Thz)

