

# LC/UPC-LC/UPC-OM5-DX-B-LSZH-X


Fiber Optic Patch Cable

 Cable length: 1m to 50m

 Fiber Type: OM5

 Fiber Count: Duplex

 Jacket Type: LSZH

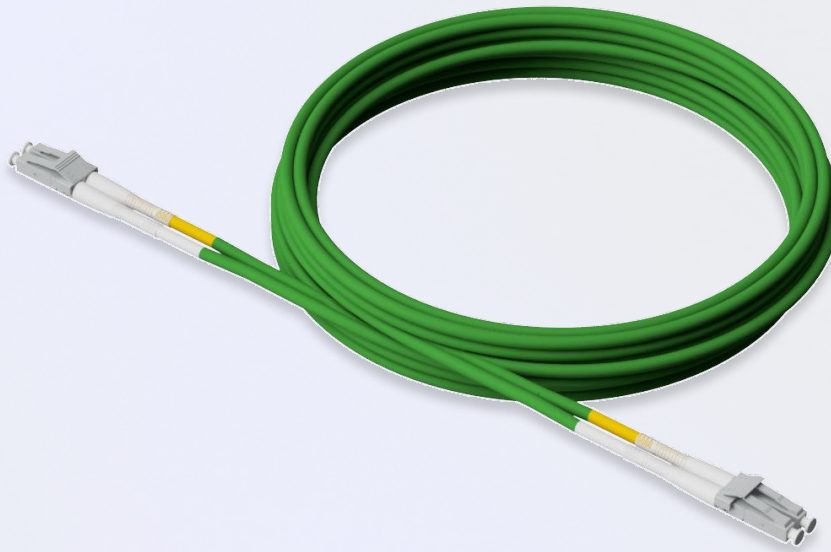

 LC to LC

 Male


 UPC to UPC

 Polarity: Type B

## Product description

LC/UPC-LC/UPC-OM5-DX-B-LSZH-X is LC Male to LC Male, OM5 Multimode, Duplex, Type A to B cable available in length from 1 meter to 50 meters. This LC to LC cable use 50/125um Multimode fiber with cable jacket diameter of 2 mm. Cable jacket material is available in Low Smoke Zero Halogen (LSZH). The LSZH cable jacket ensures lower smoke and zero smoke characteristics. The LC/UPC-LC/UPC-OM5-DX-B-LSZH-X cable supports 850nm and 1310nm wavelengths, and its attenuation at 850nm is 3.5dB/km and at 1310nm is 1.5dB/km, which ensures best performance at short distances. LC/UPC to LC/UPC patch cable guarantees the best standard grade insertion loss, which is below 0.3dB. Operating temperature is rated to -20°C to 60°C, which suits wide range of environments. LC/UPC-LC/UPC-OM5-DX-B-LSZH-X patch cable is manufactured with Type A to B configuration to support transceiver to transceiver connections. This patch cable is CE/RoHS certified and is compliant with product safety standards. This LC to LC cable is fully compliant to ISO/IEC-61754, EN 50399 and EN 50575 specification. Consequently, compliance to above standards guarantees that LC to LC cable is intermateable with other manufacturer equipment (cables, cassettes, adapters). And as well ensures that cable jacket fully meets its material properties.


## Connectivity

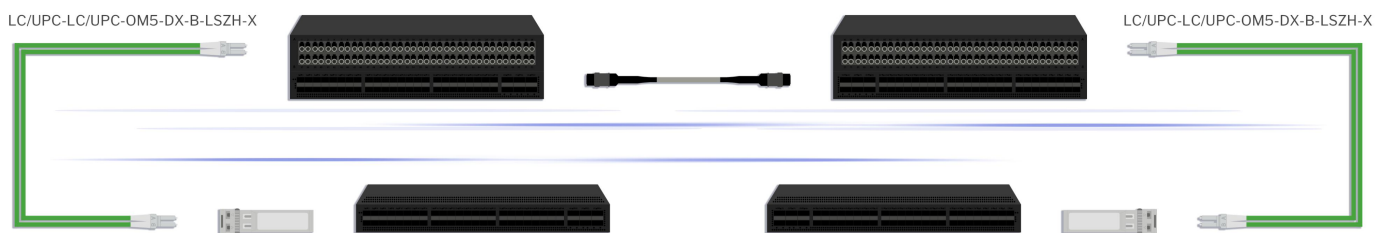

## Product Specification:

Connector A:	LC Male	Wavelength:	830 / 1300 nm
Connector B:	LC Male	Attenuation at 850 nm:	3.5 dB/km
Polarity:	Type B	Attenuation at 1310 nm:	1.5 dB/km
Fiber Type:	OM5 50/125um Multi-Mode Fiber (MMF)	Insertion Loss MPO:	0.3 dB
Fiber Count:	Duplex	Storage Temperature:	-20°C to + 60°C
Polish Type:	UPC to UPC	Operating Temperature:	-20°C to + 60°C
Jacket Diameter:	2.0 mm	Minimum Bend Radius:	30 mm
Jacket Type:	LSZH	Color:	Green
Length:	1 to 50 m		

## Mechanical Dimensions

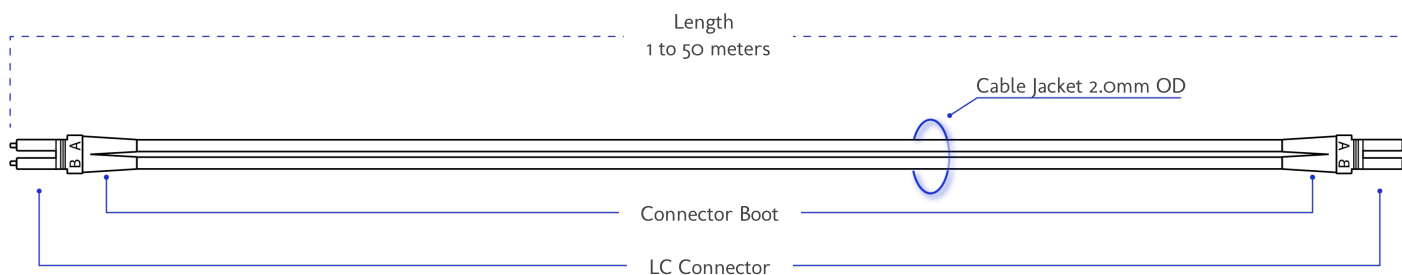

## Supported Versions:

SKU	Description
LC/UPC-LC/UPC-OM5-DX-B-LSZH- <b>X</b> *	LC/UPC to LC/UPC, Type A to B, Duplex, OM5 50/125µm, LSZH Patch cable, Length <b>X Meter/s</b> *)

**X** - cable length in meters

\*To inquire about custom lengths, please contact our support team.

## Warranty

EDGE Optic's provides a limited warranty for **sixty (60) months** from Purchaser's receipt of the Equipment represented in this data sheet against defective design or workmanship.



EDGE Technologies Ltd.  
Plienciema Street 33, Marupe,  
Latvia, LV-2167

+371 22084457  
www.edgeoptic.com  
sales@edgeoptic.com

