

Product Data Sheet



Fiber Optic Trunk Cable: MPO-MPO-OM4-12B

Product Description:

MPO-MPO-OM4-12B is MPO to MPO Female, OM4 Multimode, 12 Fiber, Type B cable avaliable in length from 1 meter to 50 meters. This MPO to MPO cable use 50/125 micron Multimode fiber with cable jacket diameter of 3 mm. Cable jacket material is avaliable in two options - Low Smoke Zero Halogen (LSZH) or Optical Fiber Nonconductive Plenum (OFNP). The LSZH cable jacket ensures lower smoke and zero smoke characteristics, but OFNP cables have fire-resistance and low smoke characteristics. OFNP is the highest fire rating fiber cable and no other cable types can be used as substitutes. MPO to MPO cable supports 850nm and 1310nm wavelengts, and it's attenuation at 850nm is 2.5dB/km and at 1310nm is 0.6dB/km which ensures best performance at short distances. MPO to MPO cable guarantees the best standard grade insertion loss which is below 0.7dB. Operating temperature is rated to -20C to +70C which suits wide range of environments. MPO-MPO-OM4-12B MPO to MPO cable is manufactured with Type B crossover configuration to support transceiver to transceiver or transceiver to patch panel high speed 40G/100G Data Center applications.

MPO-MPO-OM4-12B patch cable is CE/RoHS certified and is compliant with product safety standards. MPO to MPO cable is fully compliant to ISO/IEC-61754, EN 50399 and EN 50575 specification. Consequently, compliance to above standards guarantees that MPO to MPO cable is intermateable with other manufacturer equipment (cables, cassetes, adapters). And as well ensures that cable jacket fully meets its material properties.








Product Specification:

| General parameter | Value |
|----------------------------|--|
| Connector A: | MPO Female |
| Connector B: | MPO Female |
| Polarity: | Type B |
| Fiber Type: | OM4 50/125um Multi-Mode Fiber (MMF) |
| Fiber Count: | 12 |
| Polish Type: | UPC to UPC |
| | |
| Jacket Diameter: | 3.0mm |
| Jacket Type: | LSZH OFNP |
| Wavelength: | 850 1310 nm |
| Attenuation at 850 nm: | < 2.5 dB/km |
| Attenuation at 1310 nm: | < 0.6 dB/km |
| Insertion Loss: | < 0.7 dB |
| Return Loss: | > 25 dB |
| Storage Temperature: | -40°C to +85°C |
| Operating Temperature: | -20°C to +70°C |
| Installation Tensile Load: | 100N |
| Long Term Tensile Load: | 50N |
| Minimum Bend Radius: | 7.5mm |
| Color: | Magenta |
| Cable Length: | 1m 2m 3m 5m 7m 10m 15m 20m 25m 30m 35m 40m 45m 50m |





Mechanical Dimensions:

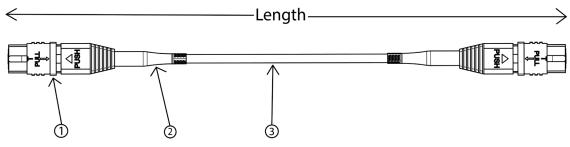

1. MTP MPO Connector Supported Versions:

2. Connector Boot

3. Cable Jacket 3.0mm OD

| PN | Description |
|-------------------------|---|
| MPO-MPO-OM4-12B-LSZH-1 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 1 Meter) |
| MPO-MPO-OM4-12B-LSZH-2 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 2 Meter) |
| MPO-MPO-OM4-12B-LSZH-3 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 3 Meter) |
| MPO-MPO-OM4-12B-LSZH-5 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 5 Meter) |
| MPO-MPO-OM4-12B-LSZH-7 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 7 Meter) |
| MPO-MPO-OM4-12B-LSZH-10 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 10 Meter) |
| MPO-MPO-OM4-12B-LSZH-15 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 15 Meter) |
| MPO-MPO-OM4-12B-LSZH-20 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 20 Meter) |
| MPO-MPO-OM4-12B-LSZH-25 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 25 Meter) |
| MPO-MPO-OM4-12B-LSZH-30 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 30 Meter) |
| MPO-MPO-OM4-12B-LSZH-35 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 35 Meter) |
| MPO-MPO-OM4-12B-LSZH-40 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 40 Meter) |





Supported Versions:

| PN | Description |
|-------------------------|---|
| MPO-MPO-OM4-12B-LSZH-45 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 45 Meter) |
| MPO-MPO-OM4-12B-LSZH-50 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, LSZH, Magenta, 50 Meter) |
| MPO-MPO-OM4-12B-OFNP-1 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 1 Meter) |
| MPO-MPO-OM4-12B-OFNP-2 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 2 Meter) |
| MPO-MPO-OM4-12B-OFNP-3 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 3 Meter) |
| MPO-MPO-OM4-12B-OFNP-5 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 5 Meter) |
| MPO-MPO-OM4-12B-OFNP-7 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 7 Meter) |
| MPO-MPO-OM4-12B-OFNP-10 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 10 Meter) |
| MPO-MPO-OM4-12B-OFNP-15 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 15 Meter) |
| MPO-MPO-OM4-12B-OFNP-20 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 20 Meter) |
| MPO-MPO-OM4-12B-OFNP-25 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 25 Meter) |
| MPO-MPO-OM4-12B-OFNP-30 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 30 Meter) |
| MPO-MPO-OM4-12B-OFNP-35 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 35 Meter) |
| MPO-MPO-OM4-12B-OFNP-40 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 40 Meter) |
| MPO-MPO-OM4-12B-OFNP-45 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 45 Meter) |
| MPO-MPO-OM4-12B-OFNP-50 | MPO Female to MPO Female Fiber Optic Trunk Cable (12 Fiber, Type B, OM4 50/125um MMF, UPC, OFNP, Magenta, 50 Meter) |





Warranty:

EDGE Optic's provides a limited warranty for sixty (60) months from Purchaser's receipt of the Equipment represented in this data sheet against defective design or workmanship.

