



## 9 Data Channels Single Fiber Passive CWDM Mux/Demux SCMD-9B

### Product Description:

We designed EDGE Optics xWDM Series products to allow easy, gradual, logical and cost efficient expansion of network bandwidth using industry leading passive WDM technology. Main advantage of xWDM is its passive nature – no power supply or cooling necessary, robustness – no special micro-climate requirements and as passive element, it has MTBF 100+ Years. xWDM is – it is fully data rate or line protocol neutral – it is possible to use with colored transceivers supporting such applications as 1G/10G Ethernet, SDH/SONET and 8/4/2/1G Fiber Channel. It's simple to install, requires no configuration or maintenance.

SCMD-9B is passive multiplexer/De-multiplexer package based on Thin-Film Filter (TFF) technology, allowing organize 9 duplex and parallel protocol independent ITU-T G.694.2 compatible Coarse Wavelength Division Multiplex (CWDM) data streams over single fiber of single mode optical fiber. With our focus to provide maximally low insertion loss, SCMD-9B is equipped with band-pass or skip filters extending maximum distance of CWDM connections. SCMD-9B is manufactured as LGX type B module, installed in 19" 1U subrack fitting any standard equipment rack. SCMD-9B is used together with counterpart SCMD-9A module in other end of line. Monitor port(1%) ensures easy troubleshooting without downtime.

### Key Highlights:

- 9 CWDM Data Streams over Single SMF
- Fully Passive: No Power Supply or Cooling
- MTBF: 100+ Years
- Protocol & Data Rate neutral
- Low Insertion Loss - 3.2 dB
- Band-Pass / Skip filters Installed
- Compact: LGX Type B package
- Easy Installation & Expansion
- Monitoring Port for easy troubleshooting
- 5 Year Warranty




## Product Specification:


Parameter		Unit	Value
Product Type:			CWDM MUX/DEMUX Unit
Number of Data Streams:			9
Number of Channels		Ch	18 CWDM Channels According ITU-T G.694.2
Transport Media:			Single Fiber Single Mode Fiber (SMF)
Operating Wavelengths:	center	nm	Ch1-Tx:1291nm    Ch4-Rx:1391nm    Ch8-Tx:1571nm Ch1-Rx:1271nm    Ch5-Tx:1451nm    Ch8-Rx:1551nm Ch2-Tx:1331nm    Ch5-Rx:1431nm    Ch9-Tx:1611nm Ch2-Rx:1311nm    Ch6-Tx:1491nm    Ch9-Rx:1591nm Ch3-Tx:1371nm    Ch6-Rx:1471nm Ch3-Rx:1351nm    Ch7-Tx:1531nm Ch4-Tx:1411nm    Ch7-Rx:1511nm
Filter Technology:			TFF (Thin Film Filter)
Passband:	$\lambda_{center}$	nm	$\pm 6.5$ nm
Channel Spacing:		nm	20 nm
Band-Pass ("Skip") Filters:			Yes
Insertation Loss <small>Passband:</small>	Max	dB	3.2 dB
Insertation Loss <small>1% Monitor Port:</small>	Max	dB	23.8 dB
Monitoring Port Type:			Yes - 1% Monitoring Port
Isolation Adjacent Channels:	Min	dB	30 dB
Isolation Non-Adjacent Channels:	Min	dB	40 dB
Channel Passband Ripple:	Min	dB	0.3 dB
Plarization Dependant Los (PDL):	Max	dB	<0.15 dB
Polarization Mode Dispersion (PMD):	Max	ps/nm	< 0.20 ps/nm
Directivity:	Min	dB	>50 dB
Return Loss:	Min	dB	>45 dB
Maximum Power Handling:	Max	mW	< 300 mW
Connectors:			LC Adapters for use with TIA/EIA 604-10 compliant LC UPC Connectors
Operating Temperature:		(°C)	-5~+70 (°C)
Storage Temperature:		(°C)	-40~+85 (°C)
Dimensions (W x H x D):		mm	214 x 41.3 x 198
Relative Humidity:		%	0 - 90%
Compliance:			ITU-T G.694.2, CE, ISO, RoHS, Telecordia GR-20



## Functional Diagram:

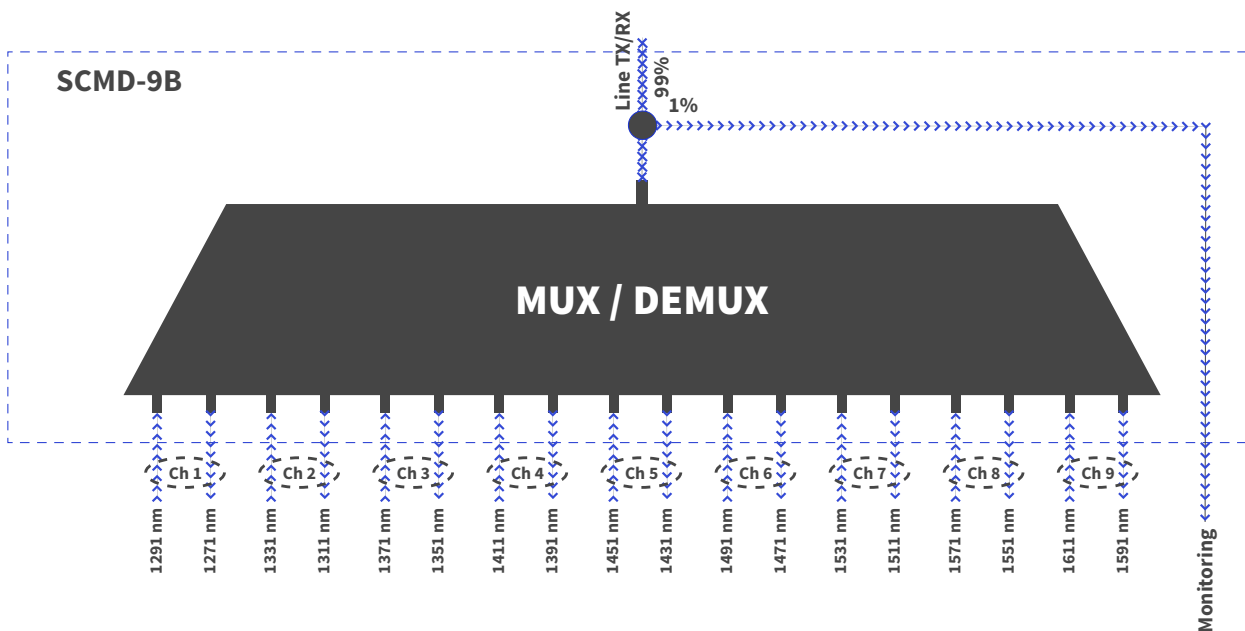

## Network Diagram:

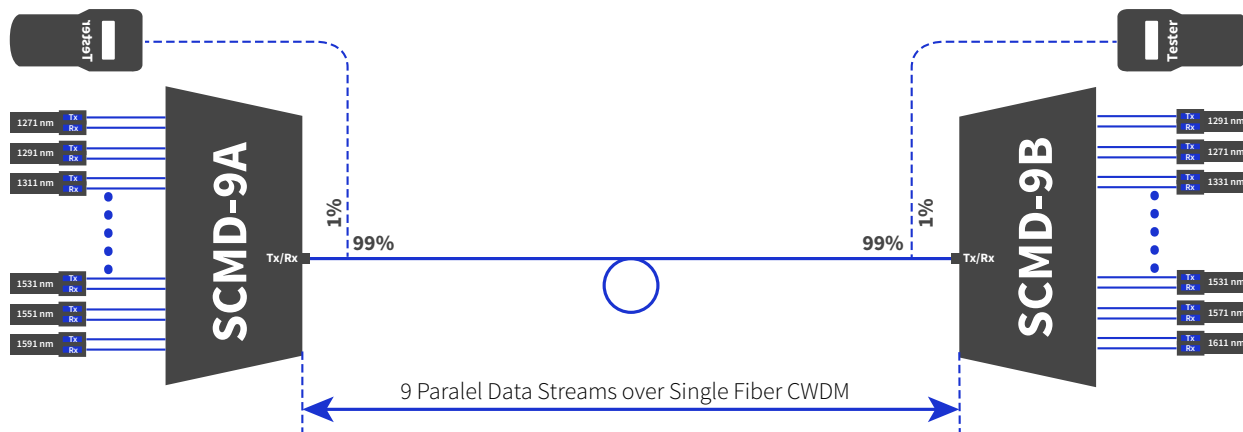

## Front Panel:



Line: Line interface for common signal  
 Mon. Interface for in-service performance testing

1270-1610: CWDM Channel colored transceivers interfaces

## Installation:



In order to install CWDM LGX Module in 19" rack, please order 19" 1U sub-rack supporting up to two LGX modules. Product code **LGX-RCK-2-1U**.

## Warranty:

EDGE Optic's provides a limited warranty for **sixty (60)** months from Purchaser's receipt of the Equipment represented in this data sheet against defective design or workmanship.

